Pro Series

Semi Downdraft Paint Booth



STANDARD FEATURES

18 ga. galvanized steel construction panels
(12) Light Fixtures Total - (6) Upper Angled Lights / (6) Wall Lights
20" x 20" ring panel filters. Prefilter, Ceiling Filter, Exhaust Filter Included
1 personnel door with wire reinforced glass
3 PHASE 5 HP MOTOR/ 30" Fan / 10,000 CFM



INDUSTRIAL

SAIMA of North America Inc. Randolph, New Jersey 07869 [(800) 524-0340 info@accudraftpaintbooths.com [www.accudraftpaintbooths.com












Semi Downdraft Paint Booth

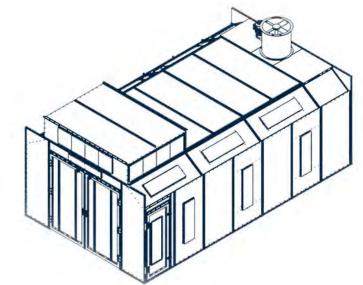

Standard Model: GALVANIZED Single Skin Spray Booth Solid Back

This unit includes the inside access fixtures and bulbs. This unit DOES NOT include wiring or ducting above the fans

| Model: | VP-RE24 | Negative Pressure Semi Down Draft - 24' l x 14' w x 9' h Inside | |
|--|--|---|--|
| OPTIONS: | | | |
| Construction: | | | |
| PB-WW | White on White Option | | |
| Doors: | | | |
| VP-DT Drive Through (Two Doors) | | | |
| VP-SD Additional Service Door with Observation Window | | | |
| Extensions: | | | |
| | LEX2 2' Length Extension (Max 30' Long) | | |
| VP-HEX1 | 1' Height Extension (Max 12' | High Inside) | |
| Optional AMU: | | | |
| SA10 PRO AMU - 7.5 HP Motor / 10,000 CFM / 1.2 Mil BTU Direct Fired Burner Smart Pad Controls Inlcuded | | | |
| Exhaust System: VP-EB5HP | Rear Exhaust Oshurana EUE | NAshara (2011 Tuka Avial Farra (40,000 CEM | |
| Controls: | Real [®] Exhaust Columns - 5 HF | 9 Motors/ 30" Tube Axial Fans/ 10,000 CFM | |
| 90500 | On /Off Control Donal for Nor | n-Heated Booth Including Spray Gun Interlock | |
| 30300 | [Potentiometer with VFD Upc | | |
| Optional Variable Frequency Drives: | | | |
| 90275 | Variable Frequency Drive - 5 I | HP - 208/240v | |
| 90276 | Variable Frequency Drive - 7.5 HP - 208/240v | | |
| 90299 | Energy Smart Package | | |
| Electric Options: | | | |
| 3PH-240 | Three Phase Controls 208/2 | 240v | |
| 3PH-480 | Three Phase Controls 460/4 | | |
| 1PH-EX | Single Phase Option for Non-I | Heated Booth | |
| 1PH-AMU | Single Phase Option for Heat | ed Booth ** Requires Intake VFD | |
| Choose one from VFD Section Above | | | |
| Lighting: | | | |
| PVLL (6) Upper and (6) Lower Inside Access Fixtures - 4' | | | |
| Miscellaneous: | | | |
| VP-OBW | Observation Window (Each) | | |
| 90402-28 | Exhaust Duct Work Package for Max. 15' Outside Building Height | | |
| 90400-28 | Duct Work Package for Max. 15' Outside Building Height | | |



SAIMA of North America Inc.

Randolph, New Jersey 07869 (800) 524-0340

info@accudraftpaintbooths.com